


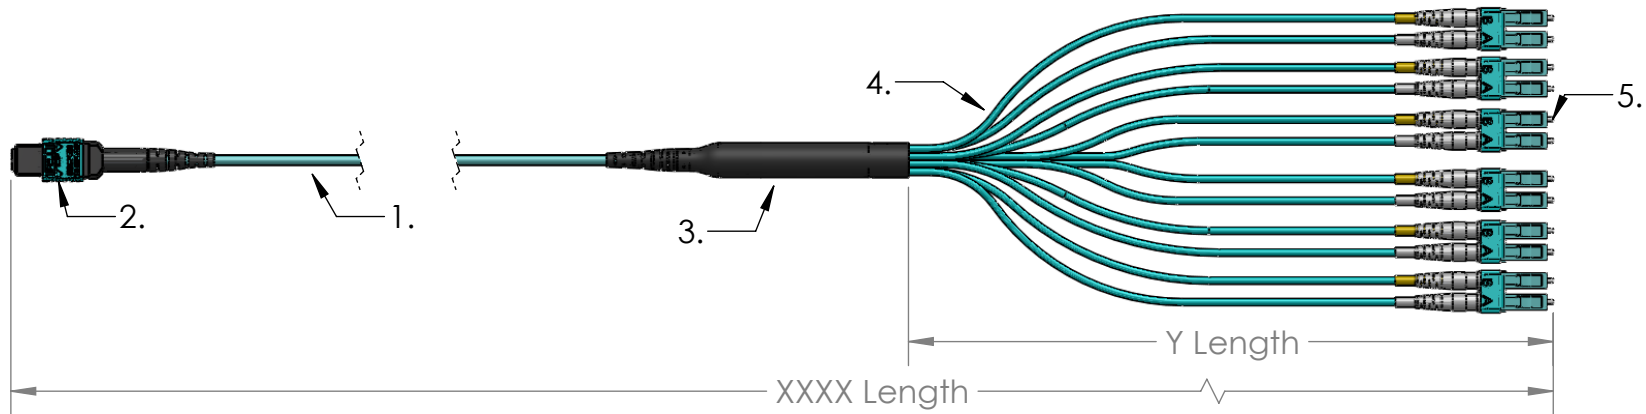


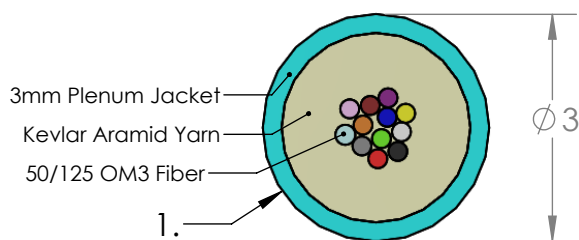

Side A



Pin	Color	Pin
1	Blue	2
2	Orange	1
3	Green	4
4	Brown	3
5	Slate	6
6	White	5
7	Red	8
8	Black	7
9	Yellow	10
10	Violet	9
11	Rose	12
12	Aqua	11



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	SP012L30100B-BIF	AFL Microcore, 12 Strand, OFNP, Multimode 50/125 10Gig OM3	XXX
2	8198/MTF-12MM7-02	MTP, Round Female Housing, Multimode, 12 Fiber Ferrule	2
3	LW-FAN-Body-Syringe	TDS Fanout Body	1
4	F00FDX2NRA-FM	DX Zipcord/2.0mm Tubing, Aqua	Y
5	931-251-2XX	Senko LC Unibody MM 127um Premium Connector w/ Boot and Duplex Clip	12

Cable Description: 12 Fiber MultiMode 50/125, 10 Gig, (1 ea) MTP 12 /PC (Female) - (6 ea) LC /PC (Duplex), Flipped Polarity, XXXX Length, Plenum Jacket, Y Length Breakout

Length	Part Number
20 Feet	VFHP-012P0IN0020-X-F
20 Meters	VFHP-012P0IN020M-X-F

General Characteristics of SP012L30100B-BIF	
Type	Multimode 50/125um OM3
Wavelength	850/1300
Operating Temperature	-0°C to +70°C
Installation Tension	50lbs (222 N)
Long term Tension	17 lbs (76N)
Installation Bend Radius	1.8 in (4.5 cm)
Long Term Bend Radius	1.2 in (3.0 cm)

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN METERS
TOLERANCES:
+ 0.30M
-0.0M

INTERPRET GEOMETRIC
TOLERANCING PER:

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	R. Jones	1/23/14
CHECKED	J. Taylor	1/23/14
ENG APPR.	R. Jones	1/23/14
MFG APPR.	J. Wolf	1/23/14
Q.A.	J. Taylor	1/23/14

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CABLES PLUS USA. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CABLES PLUS USA IS PROHIBITED.

Customer:

Cables Plus USA

5608 W. Marshall St.
Richmond, VA 23230

SIZE	PART NUMBER:	REV
A	VFHP-012P0INXXXX-Y-F	1
SCALE: NOT TO SCALE		SHEET 1 OF 1